

Scara profesionala, pliabila, cu trepte late, tip SPMS



Dimensiunile mari ale platformei de lucru (**500 x 500 mm**) cat si cele doua roti (**diametrul de 125 mm**) pivotante cu frana de la baza, asigura o utilizare comoda a produsului executie conform normelor **SR EN 131-7**

incarcare maxima admisibila: **150kg**

lonjeroane si trepte din aliaj de **aluminiu extrudat** (nu din tabla sudata) diferenta SPMS treptele tip SPMS si SPMS sunt asigurate

suplimentar cu trepte de **28 x 28 mm** incastrate in lonjeroanele scarii


2. La SPMS se folosesc numai trepte de **80 mm** iar fixarea acestora de lonjeroane se face "clasic" , prin nituire

3. La SPMS distanta intre doua trepte pe verticala este de **260 mm** iar la SPMS aceasta distanta este de **230 mm**

4. La SPMS lonjeroanele scarii sunt profile rectangulare de **61 x 23 mm** iar la SPMS aceste lonjeroane au dimensiunea de **40 x 20 mm**

OBS: In TABEL la rubrica "Nr. trepte" este adaugata si platforma

COD	Numar trepte	Inaltime platforma [m]	Inaltime scara [m]	Masa [kg]	Inaltime max. de lucru [m]
SPMS4	4	0,9	1,9	20	2.9
SPMS5	5	1,1	2,1	21	3.1
SPMS6	6	1,3	2,3	22	3.3
SPMS7	7	1,5	2,5	23	3.5
SPMS8	8	1,7	2,7	24	3.7
SPMS9	9	1,9	2,9	25	3.9
SPM10	10	2,2	3,2	26	4.2

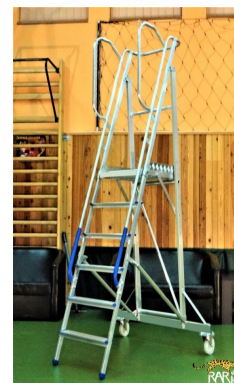

Caracteristici produs:



Caracteristici generale

- spate scara si balustrade: constructie sudata
- latime tronson scara: **550 mm**
- latime trepte: **80 mm**
- distanta intre trepte: **230 mm**
- platforma de sus din aluminiu striat
- aria platformei: **500 x 500 mm**
- diametrul roti cu frana: **125 mm**

