



Scara pisica pentru acces, evacuare, incendiu, cu un tronson, din otel zincat, tip SP1TO

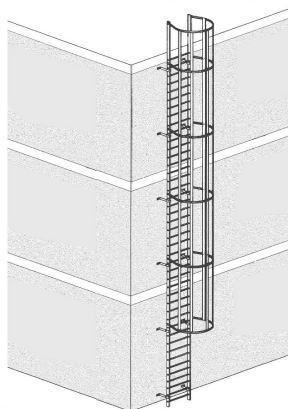

-	1	2	3	4	5	6	7	8	9	10
Cod produs	Inaltime urcare [m]	Inaltime totala [m]	Sectiune de 1,96 m [buc]	Sectiune de 2,8 m [buc]	Sectiune de 3,64 m [buc]	Prinderi perete [buc]	Protectie spate orizontala [buc]	Protectie spate verticala [buc]	Bara iesire [buc]	Masa [kg]
SP1TO 4.8	4.8	5.9	1	1	-	4	4	7	2	57
SP1TO 5.6	5.6	6.7	-	2	-	4	4	7	2	72
SP1TO 6.5	6.5	7.6	-	1	1	4	5	10	2	86
SP1TO 7.4	7.4	8.5	-	-	2	4	5	10	2	91
SP1TO 8.5	8.5	9.6	-	3	-	6	6	12	2	109
SP1TO 9.3	9.3	10.4	2	2	-	8	7	15	2	119

Caracteristici produs:

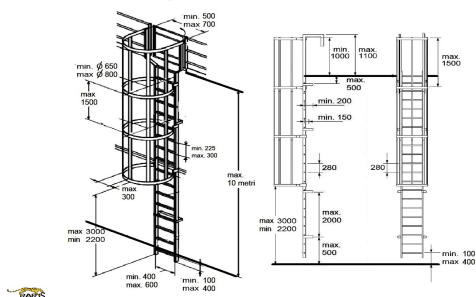

Caracteristici generale- latime scara: **520 mm**- teava rectangulara din otel zincat, scara : **50 x 20 [mm]**- trepte patrate cu gauri perforate antiderapante din otel zincat: **30 x 30 [mm]**- distanta intre trepte: **280 mm**- protectie orizontala: teava otel zincat de diametru **25 mm**- protectie verticala: teava rectangulara din otel zincat **30 x 20 [mm]**- 2 balustrade iesire din teava rectangulara din otel zincat de **50 x 20 [mm]** a) inaltime minima: **1 m** b) inaltime maxima: **1,1 m**