



- executie conf. normei **EN ISO 14122** si **SR EN 131-7**
- lonjeroane, balustrade, legaturi : **aluminiu AIMgSi**
- dispune de **3 podini** pozitionate la aceiasi inaltime sau la 3 inaltime diferite (**diferente intre podini** de **0 cm, 30 cm** sau **60 cm**)
- dimensiunile fiecarei podini sunt **33 cm x 200 cm** deci
- suprafata de lucru este **100 cm x 200 cm**
- **INALTIMEA DE LUCRU MAX. = Hpodina + 2 metri**
- greutatea maxima suportata :

- a) pe podini: **300 kg** (200 kg / mp)
- b) pe o treapta: **150 kg**


- **roti pivotante cu frana** de diametrul **125 mm**
- **suruburi de calare** reglabile pe **25 cm**
- **carlige de prindere** pentru transport cu macarale
- **PLATFORMA SI TREPTELE** au suprafetele din:

1. **Aluminiu striat 2 mm** (cod **PMCIRA**)
2. **Tabla otel expandata 3mm** (cod **PMCIRE**)

Cod	Panta de urcare [grade]	Inaltime podini min-med-max [m]	Inaltime produs totala[m]	Inaltime max lucru min-med-max [m]	Masa [kg]	Inaltime max.de lucru [m]
PMCIRA1	31	0,7-1,0-1,3	2,2	2,7-3,0-3,3	135	3.3
PMCIRA2	51	1,6-1,9-2,2	3,1	3,6-3,9-4,2	151	4.2
PMCIRA3	61	2,5-2,8-3,1	4,1	4,5-4,8-5,1	188	5.1
PMCIRE1	31	0,7-1,0-1,3	2,2	2,7-3,0-3,3	145	3.3
PMCIRE2	51	1,6-1,9-2,2	3,1	3,6-3,9-4,2	161	4.2
PMCIRE3	61	2,5-2,8-3,1	4,1	4,5-4,8-5,1	196	5.1
PMCIRT1	31	0,7-1,0-1,3	2,2	2,7-3,0-3,3	142	3.3
PMCIRT2	51	1,6-1,9-2,2	3,1	3,6-3,9-4,2	157	4.2
PMCIRT3	61	2,5-2,8-3,1	4,1	4,5-4,8-5,1	192	5.1

Caracteristici produs:

ELEMENTELE COMPONENTE ALE PLATFORMEI TIP PMCIR

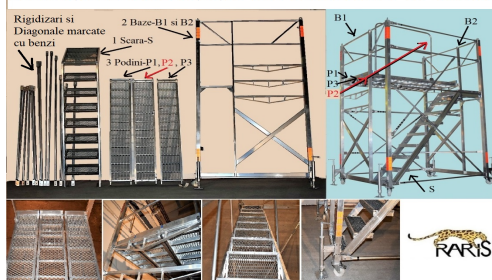

- amprenta la sol (fara picioare de calare): **1100 x 2200 mm**- picioarele de calare se pot monta pe orice parte a platformei- suprafata de lucru platforma **2 mp**- latime trepte: **500 mm** - adancime trepte: **175 mm**- inaltime balustrada podina : **1100 mm**
- inaltime parapet de protectie picioare: **7 cm**- produsul se livreaza demontat

