

Schela rabatabila formata din 2 scari de aluminiu cu balamale articulate, tip SCBA



* produsul poate fi folosit in doua moduri:

-schela cu:

- A) H lucru max = 3,9 m (PLATFORMA LA 1,9 m) la SCBA3,9
- B) H lucru max = 4,5 m (PLATFORMA LA 2,5 m) la SCBA4,5
- C) H lucru max = 5,1 m (PLATFORMA LA 3,1 m) la SCBA5,1

-doua scari cu balamale articulate si cu:

- A) 2 x 5 trepte la SCBA3,9
- B) 2 x 6 trepte la SCBA4,5
- C) 2 x 7 trepte la SCBA5,1


OBS: ca scara produsul poate fi folosit:

- A) ca 2 scari in A
- B) ca 2 scari intinse sau o scara in A si alta scara intinsa
- C) ca si capre (vezi si galeria foto)

* executie (ca scara) conform normei **EN 131**


* incarcare maxima admisibila: **150 kg** si ca scara si ca schela

Pentru cresterea stabilitatii se recomanda achizitionarea setului de estacade corespunzator fecarui tip de schela

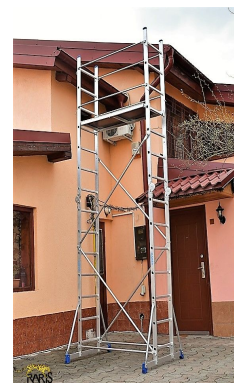

Tip	Nr trepte	Inaltime scara in A [m]	Inaltime scara intinsa [m]	Inaltime maxima podina [m]	Masa [kg]	Inaltime max. de lucru [m]
SCBA 3,9	2 x 2x5	1,4	2,9	1,9	33,7	3.9
SCBA 4,5	2 x 2x6	1,7	3,5	2,5	35,9	4.5
SCBA 5,1	2 x 2x7	2,0	4,0	3,1	38,1	5.1
Set_4_estacad e SCBA 3,9	-	-	-	-	10,8	-
Set_4_estacad e SCBA 4,5	-	-	-	-	12,0	-
Set_4_estacad e SCBA 5,1	-	-	-	-	13,2	-

Caracteristici produs:

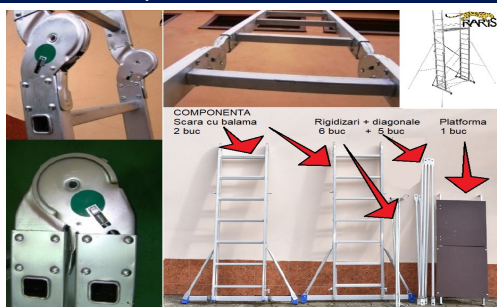

Caracteristici generale

- dimensiuni platforma **500 x 1300 mm**
- latime tronsoane: **500 mm**
- dimensiuni lonjeroane: **61,4 x 23 mm**
- dimensiuni trepte: **28 x 28 mm**
- distanta intre trepte: **280 mm**
- fixatori cu sigurante din otel zincat
- balamale din otel zincat
- traverse din aluminiu la baza
- dopuri de plastic antiderapante la capete
- amprenta la sol fara estacade: **1,5 x 1,1 metri**
- amprenta la sol cu estacade: **2,9 x 2,2 metri**