

Platforma mobila RARIS, aluminiu, 45 ⁰, dubla, Gmax = 200 kg, tip PN45D



- executie conform normei **EN ISO 14122** si **SR EN 131-7**
- panta de urcare: **45 grade**
- lonjeroane , balustrazi, suportii : **aluminiu AlMgSi**
- elementele de asamblare si BAZA : **otel zincat** sau **vopsit in pulbere**
- greutatea maxima suportata :

- a) pe podina: **200 kg**
- b) pe o treapta: **150kg**

- dimensiuni podina: **(latime trepte) x 700 mm**
- latime produs

- A) **latime trepte + 0,4 metri** pana la **7+7 +1** trepte
- B) **latime trepte + 0,8 metri** peste **7+7+1** trepte

- **roti pivotante cu frana** de diametrul **160 mm**
- **suruburi de calare** pentru lucru pe pardoseli neregulate

PODINA SI TREPTELE au suprafetele din:

1. **Aluminiu striat** sau
2. **Tabla expandata zincata** sau
3. **Tego antiderapant**

In **TABELUL DE PRETURI** se poate selecta:

1. **Suprafata podinii si treptelor** si
2. **Latimea podinii si a treptelor**

PN45D64A	4	0,8	1,9	2.2	59.8	2.8
PN45D65A	5	1,0	2,1	2.6	73.9	3.0
PN45D66A	6	1,2	2,3	3.1	81.5	3.2
PN45D67A	7	1,4	2,5	3.5	89.1	3.4

Platforma mobila RARIS, aluminiu, 45 ⁰, dubla, Gmax = 200 kg, tip PN45D

PN45D68A	8	1,6	2,7	3.9	96.7	3.6
PN45D69A	9	1,8	2,9	4.3	104.3	3.8
PN45D610A	10	1,9	3,0	4.7	111.9	3.9
PN45D611A	11	2,1	3,2	5.2	119.5	4.1
PN45D612A	12	2,3	3,4	5.6	127.1	4.3
PN45D613A	13	2,5	3,6	6.0	134.8	4.5
PN45D614A	14	2,7	3,8	6.4	142.4	4.7
PN45D615A	15	2,9	4,0	6.8	150	4.9
PN45D616A	16	3,1	4,2	7.3	157.6	5.1
PN45D617A	17	3,3	4,4	7.7	165.2	5.3
PN45D618A	18	3,5	4,6	8.1	172.8	5.5
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-

PN45D64T	4	0,8	1,9	2.2	68.5	2.8
PN45D65T	5	1,0	2,1	2.6	85.0	3.0
PN45D66T	6	1,2	2,3	3.1	94.8	3.2
PN45D67T	7	1,4	2,5	3.5	104.5	3.4
PN45D68T	8	1,6	2,7	3.9	114.3	3.6
PN45D69T	9	1,8	2,9	4.3	124.1	3.8
PN45D610T	10	1,9	3,0	4.7	133.9	3.9
PN45D611T	11	2,1	3,2	5.2	143.7	4.1
PN45D612T	12	2,3	3,4	5.6	153.4	4.3
PN45D613T	13	2,5	3,6	6.0	163.2	4.5
PN45D614T	14	2,7	3,8	6.4	173.0	4.7
PN45D615T	15	2,9	4,0	6.8	182.8	4.9
PN45D616T	16	3,1	4,2	7.3	192.6	5.1
PN45D617T	17	3,3	4,4	7.7	202.3	5.3
PN45D618T	18	3,5	4,6	8.1	212.1	5.5
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-


PN45D64G	4	0,8	1,9	2.2	58.5	2.8
----------	---	-----	-----	-----	------	-----

Platforma mobila RARIS, aluminiu, 45⁰, dubla, Gmax = 200 kg, tip PN45D

PN45D65G	5	1,0	2,1	2.6	72.3	3.0
PN45D66G	6	1,2	2,3	3.1	79.7	3.2
PN45D67G	7	1,4	2,5	3.5	87.0	3.4
PN45D68G	8	1,6	2,7	3.9	94.4	3.6
PN45D69G	9	1,8	2,9	4.3	101.7	3.8
PN45D610G	10	1,9	3,0	4.7	109.1	3.9
PN45D611G	11	2,1	3,2	5.2	116.5	4.1
PN45D612G	12	2,3	3,4	5.6	123.8	4.3
PN45D613G	13	2,5	3,6	6.0	131.1	4.5
PN45D614G	14	2,7	3,8	6.4	138.3	4.7
PN45D615G	15	2,9	4,0	6.8	145.6	4.9
PN45D616G	16	3,1	4,2	7.3	152.9	5.1
PN45D617G	17	3,3	4,4	7.7	160.2	5.3
PN45D618G	18	3,5	4,6	8.1	167.5	5.5
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-
Set calare PM2	-	-	-	-	-	-
Set calare PM1	-	-	-	-	-	-
Set calare PM2	-	-	-	-	-	-

Caracteristici produs:

Platforma mobila RARIS, aluminiu, 45 ⁰, dubla, Gmax = 200 kg, tip PN45D

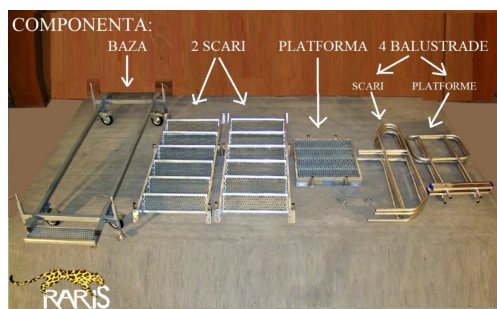

Caracteristici:

- latime trepte si podina (inclusiv lonjeroanele laterale):

600/800/100 mm

- adancime trepte: 240 mm

- distanta intre doua trepte consecutive

a) pe verticala: 210 mm

b) pe orizontala: 210 mm

- inaltime balustrade podina: 1000 mm

- adancime podina: 700 mm

(sau alta dimensiune la comanda)