




executie conform normei **EN 131**
incarcare maxima admisibila: **150kg**
lonjeroane si trepte din aliaj de **aluminiu extrudat** (nu din tabla sudata)
Datorita **balamalelor speciale**, aceste scari de aluminiu se pot
impacheta si sunt mai usor de transportat si depozitat.

Usor de manipulat si mai multe moduri de lucru:


1. scara simpla
2. scara extinsa
3. scara in A

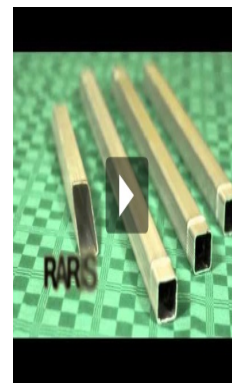

Tip	Nr. trepte	Inaltime in A [m]	Inaltime max lucru in A [m]	Inaltime scara intinsa [m]	Inaltime max lucru scara intinsa [m]	Masa [kg]	Inaltime max. de lucru [m]
SBA 2x5	2x5	1,4	2,8	2,9	4,0	8,5	4.0
SBA 2x6	2x6	1,7	3,1	3,5	4,6	9,5	4.6
SBA 2x7	2x7	2,0	3,4	4,1	5,2	10,5	5.2
SBA 2X8	2X8	2.3	3.7	4.7	5.8	12.0	5.8



Caracteristici produs:

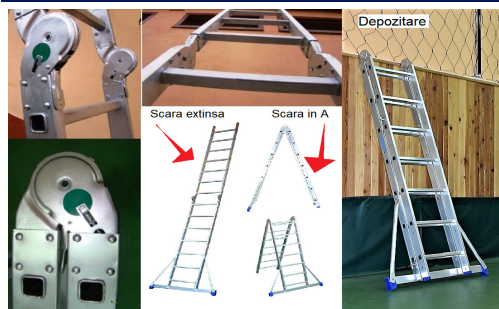

Caracteristici generale scari aluminiu cu balamale articulate

- latime tronsoane: **500 mm**
- dimensiuni lonjeroane: **61,4 x 23 mm**
- dimensiuni trepte: **28 x 28 mm**
- grosime pereti lonjeroane si trepte: **1,3 mm**
- distanta intre trepte: **280 mm**
- balamale cu blocare automata din otel zincat
- traverse din aluminiu la baze- stabilizator la baza
- dopuri de plastic antiderapante la capetele traverselor de baza

