



- executie conform normei EN ISO 14122 si SR EN 131-7
- panta de urcare: 45 grade
- lonjeroane , balustrazi, suportii : aluminiu AlMgSi
- elementele de asamblare si BAZA : otel zincat sau vopsit in pulbere
- greutatea maxima suportata :

- a) pe produs: 400 kg
- b) pe o treapta: 200 kg

- indiferent de latimea treptelor (60, 80 sau 100 cm) podina este extinsa la dimensiunea de 120 x 120 cm
- PLATFORMA SI TREPTILE au suprafetele din:
 1. Aluminiu striat sau
 2. Tabla expandata zincata sau
 3. Tego antiderapant


P2F4564A	4	0,8	1,9	2.0	49.9	2.8
P2F4565A	5	1,0	2,1	2.2	53.9	3.0
P2F4566A	6	1,2	2,3	2.5	57.9	3.2
P2F4567A	7	1,4	2,5	2.7	61.9	3.4
P2F4568A	8	1,6	2,7	2.9	65.9	3.6
P2F4569A	9	1,9	3,0	3.1	69.9	3.9
P2F45610A	10	2,1	3,2	3.3	73.9	4.1
P2F45611A	11	2,3	3,4	3.5	77.9	4.3
P2F45612A	12	2,5	3,6	3.7	81.9	4.5
P2F45613A	13	2,7	3,8	3.9	85.9	4.7
P2F45614A	14	2,9	4,0	4.1	89.9	4.9
P2FM45615A	15	3,1	4,2	4.3	93.9	5.1
P2FM45616A	16	3,3	4,4	4.6	97.9	5.3
P2F45617A	17	3,5	4,6	4.8	101.9	5.5
P2F45618A	18	3,7	4,8	5.0	105.9	5.7

P2F4564T	4	0,8	1,9	2.0	67.4	2.8
P2F4565T	5	1,0	2,1	2.2	61.4	3.0
P2F4566T	6	1,2	2,3	2.5	65.4	3.2
P2F4567T	7	1,4	2,5	2.7	69.4	3.4
P2F4568T	8	1,6	2,7	2.9	73.4	3.6
P2F4569T	9	1,9	3,0	3.1	77.4	3.9
P2F45610T	10	2,1	3,2	3.3	81.4	4.1
P2F45611T	11	2,3	3,4	3.5	85.4	4.3
P2F45612T	12	2,5	3,6	3.7	89.4	4.5

P2F45613T	13	2,7	3,8	3.9	93.4	4.7
P2F45614T	14	2,9	4,0	4.1	97.4	4.9
P2F45615T	15	3,1	4,2	4.3	101.4	5.1
P2F45616T	16	3,3	4,4	4.6	105.4	5.3
P2F45617T	17	3,5	4,6	4.8	109.4	5.5
P2F45618T	18	3,7	4,8	5.0	113.4	5.7

P2F4564G	4	0,8	1,9	2.0	48.2	2.8
P2F4565G	5	1,0	2,1	2.2	52.0	3.0
P2F4566G	6	1,2	2,3	2.5	55.9	3.2
P2F4567G	7	1,4	2,5	2.7	59.8	3.4
P2F4568G	8	1,6	2,7	2.9	63.6	3.6
P2F4569G	9	1,9	3,0	3.1	67.5	3.9
P2F45610G	10	2,1	3,2	3.3	71.3	4.1
P2F45611G	11	2,3	3,4	3.5	75.2	4.3
P2F45612G	12	2,5	3,6	3.7	79.1	4.5
P2F45613G	13	2,7	3,8	3.9	82.9	4.7
P2F45614G	14	2,9	4,0	4.1	86.8	4.9
P2F45615G	15	3,1	4,2	4.3	90.6	5.1
P2F45616G	16	3,3	4,4	4.6	94.5	5.3
P2F45617G	17	3,5	4,6	4.8	98.4	5.5
P2F45618G	18	3,7	4,8	5.0	102.2	5.7

Caracteristici produs:

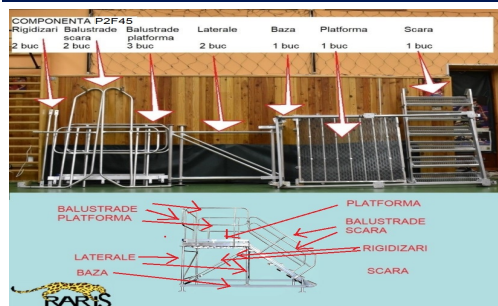

Caracteristici:

- latime trepte: 600 / 800 / 1000 mm
- grosime trepte: 30 mm
- adancime trepte: 240 mm
- distanta intre doua trepte consecutive
 - a) pe verticala: 210 mm
 - b) pe orizontala: 210 mm
- inaltime balustrade: 1000 mm
- adancime platforma: 700 mm (sau alta dimensiune la comanda)

OBS: La baza produsul dispune de un sistem surub/piulita ce permite reglarea inaltimi pe o distanta de 5 cm pentru compensarea diferentelor de nivel. Dupa compendare , produsul trebuie incastrat in pardosea