

Scara mobila cu platforma, din aluminiu, la 70 grade, blocare la urcare, produs RARIS, tip PSF70




- executie conform normei **SR EN 131-7**
- panta de urcare: **70 grade**
- material lonjeroane si suporti: aluminiu **AlMgSi**
- material trepte: **aluminiu nervurat** (pentru evitarea alunecarii)
- material platforma: **aluminiu striat** (pentru aderenta sporita in lucru)
- greutatea maxima suportata :
 - **200 kg** pe treapta
 - **300 kg** pe platforma
- treptele au adancimea de **80 mm** si sunt asigurate suplimentar cu trepte de **28 x 28 mm** incastrate in lonjeroanele scarii



Tip	Nr. trepte	Inaltime platforma [m]	Inaltime totala [m]	Lungime scara [m]	Lungime traversa baza [m]	Masa [kg]	Inaltime max. de lucru [m]
PSF703	3	0,8	1,9	1,2	0,9	20,6	2.8
PSF704	4	1,0	2,1	1,3	0,9	22,1	3.0
PSF705	5	1,3	2,4	1,4	1,1	23,6	3.3
PSF706	6	1,5	2,6	1,5	1,1	25,1	3.5
PSF707	7	1,8	2,9	1,6	1,1	26,6	3.8
PSF708	8	2,1	3,2	1,7	1,3	28,1	4.1
PSF709	9	2,3	3,4	1,8	1,3	29,6	4.3
PSF7010	10	2,6	3,7	1,9	1,3	31,1	4.6



Caracteristici produs:

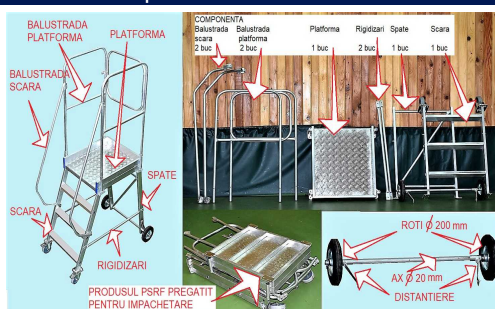

Caracteristici generale:- In tabel la " Numar trepte" se

- considera si platforma
- latime trepte si platforma: **600 mm**--adancime platforma: **700 mm** (sau alta dimensiune la comanda)
- grosime trepte: **30 mm**
- adancime trepte: **80 mm**
- inaltime balustrade: **500 mm**(perpendiculara pe scara)
- inaltime balustrada platforma: **1100 mm**
- diametrul rotilor de deplasare :
 - a) fata: roti cu frana , diametrul **125 mm**
 - b) spate: roti fixe, diametrul **200 mm**

