


Scara RARIS, electroizolanta, fibra sticla, platforma mare, trepte inguste, tip SPMIE



- dimensiunile mari, atat ale platformei de lucru (500x500 mm) cat si ale treptelor de urcare (500 x 80 mm) asigura o utilizare comoda a produsului
- scara SPMF este mobila fiind deplasabila usor datorita celor doua roti fixe cu frana (diametrul de 125 mm) de la baza
- executie conform normelor EN 131 si DS / EN 61478:2002
- incarcare maxima admisibila: 150kg
- inaltimea maxima de lucru este inaltimea platforma + 2 metri
- lonjeroane electroizolante din profile pultrudate din poliesteri armati cu fibra de sticla, prescurtat PAFS
- lonjeroane la baza si trepte din aluminiu EN AW 6063 T6
- platforma din aluminiu Al Mg Si cu striuri antiderapante
- pentru cresterea sigurantei in functionare, treptele cu adancimea de 80 mm sunt asigurate suplimentar cu trepte de 28 x 28 mm incastrate in lonjeroanele scarii
- OBS: In TABEL la pozitia "Nr. trepte" apare inclusiv platforma.

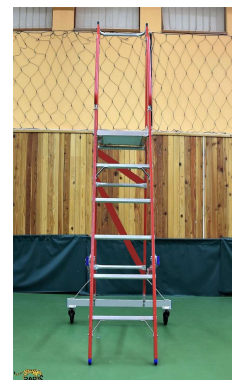

Cod	Nr. trepte	Inaltime platforma [m]	Inaltime totala [m]	Masa [kg]	Inaltime max. de lucru [m]
SPMI4E	4	1,0	2,0	20.6	3.0
SPMI5E	5	1.3	2,3	21.6	3.3
SPMI6E	6	1,6	2,6	23.0	3.6
SPMI7E	7	1,8	2,8	24.5	3.8
SPMI8E	8	2.1	3,1	26.0	4.1
SPMI9E	9	2,4	3,4	28.4	4.4
SPMI10E	10	2,6	3,6	30.5	4.6
SPMI11E	11	2,9	3,9	34.6	4.9
SPMI12E	12	3,1	4,1	36.5	5.1
SPMI13E	13	3,4	4,4	38.7	5.4
SPMI14E	14	3,7	4,7	42.75	5.7

Caracteristici produs:



Caracteristici generale - latime tronsoane scara: 550 mm- dimensiuni lonjeroane pultrudate: 59x25x3 mm- dimensiuni baza aluminiu: 61x23x1,7 mm- dimensiuni trepte: 28 x 28 mm- inaltime balustrada platforma: 1000 mm- distanta intre trepte: 280 mm- balamale din otel zincat - dopuri de plastic antiderapante la baza

