



Scara RARIS, electroizolanta, fibra sticla, platforma mare, trepte late, tip SPMFE

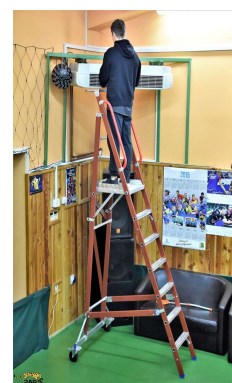

- dimensiunile mari, atat ale platformei de lucru (500x500 mm) cat si ale treptelor de urcare (500 x 80 mm) asigura o utilizare comoda a produsului
- scara SPMFE este mobila fiind deplasabila usor datorita celor doua roti fixe cu frana (diametrul 125 mm) de la baza
- executie conform normelor EN 131 si DS / EN 61478:2002
- incarcare maxima admisibila: 150kg
- inaltimea maxima de lucru este inaltimea platforma + 2 metri
- lonjeroane electroizolante din profile pultrudate din poliesteri armati cu fibra de sticla, prescurtat PAFS
- lonjeroane la baza si trepte din aluminiu EN AW 6063 T6
- platforma din aluminiu Al Mg Si cu striuri antiderapante
- pentru cresterea sigurantei in functionare, treptele cu adancimea de 80 mm sunt asigurate suplimentar cu trepte de 28 x 28 mm incastrate in lonjeroanele scarii
- OBS: In TABEL la pozitia "Nr. trepte" apare inclusiv platforma.

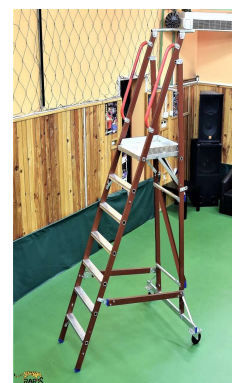

Cod	Nr. trepte	Inaltime platforma [m]	Inaltime scara [m]	Masa [kg]	Inaltime max. de lucru [m]
SPMF4E	4	1,0	2,0	22.3	3.0
SPMF5E	5	1,3	2,3	23.6	3.3
SPMF6E	6	1,6	2,6	25.3	3.6
SPMF7E	7	1,8	2,8	27.1	3.8
SPMF8E	8	2,1	3,1	29.0	4.1
SPMF9E	9	2,4	3,4	31.7	4.4
SPMF10E	10	2,6	3,6	34.1	4.6
SPMF11E	11	2,9	3,9	38.6	4.9
SPMF12E	12	3,1	4,1	40.8	5.1
SPMF13E	13	3,4	4,4	43.3	5.4
SPMF14E	14	3,7	4,7	47.6	5.7

Caracteristici produs:



- Caracteristici generale** - latime tronsoane scara: 550 mm- dimensiuni lonjeroane pultrudate PAFS: 1) 59x25x3 mm pana la SPMFE 9 inclusiv 2) 73x25x3 mm de la SPMFE11 inclusiv- rigidizari si diagonale: PAFS de 59x25x3
- dimensiuni baza aluminiu: 61x23x1,7 mm- adancime trepte: 80 mm- distanta intre trepte: 280 mm
 - inaltime balustrada platforma: 1000 mm- balamale din otel zincat
 - dopuri de plastic antiderapante la baza