

Schela RARIS electroizolanta, fibra sticla, inaltimea maxima lucru 5,8 metri, cod ESRE 5.8 si ESRE 5.7




- produsul respecta cerintele standardelor **SR EN 131-1 si 2** si normei **E85-200** ce prezinta cerintele minime pentru o schela cu inaltimea platformei de lucru de pana la 5 metri.
- material lonjeroane, estacade, rigidizari, diagonale : **profile pultrudate din fibra de sticla**
- trepte, rigidizare baza si suport platforma: **aluminiu AIMgSi**
- suprafata platformei: **tego antiderapant de 10 mm**
- greutatea maxima suportata :

150 kg pe treapta

200 kg pe platforma


- Produsul este realizat in doua variante:

1. **ESRE 5.8**: cu **4 roti cu frana**, diametrul **125 mm**
2. **ESRE 5.7**: cu **4 dopuri plastic** si **2 roti fixe**, diametrul **75 mm**
 - la varianta **ESRE 5.7 metri**, tronsoanele laterale pot fi utilizate ca **doua scari electroizolante** cu lungimea de **4,7 metri**
 - La "Detalii produs" sunt prezentate principalele caracteristici dimensionale ale schelei ESRE-3.8 si componentele acesteia

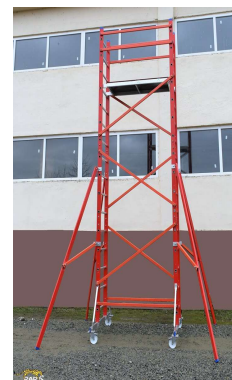

Cod	Inaltime max platforma [m]	Inaltime schela [m]	Supragata platforma [m]x[m]	Amprenta la sol [m]	Masa [kg]	Inaltime max. de lucru [m]
ESRE-5,8	3,8	4,8	1,3x0,5	2,1x3,1	66.6	5.8
ESRE-5.7	3,7	4,7	1,3x0,5	2,1x3,1	63.3	5.7

Caracteristici produs:



ESRE - 5.8

- a) H podina = 3,8 m
- b) H lucru max. aprox. = 5,8 m
- c) Masa = 66,8 kg

Componenta

Cod	Componenta	Nr buc	Masa buc [kg]	Masa total [kg]
1	Scara 5 trepte	2	8.0	16.0
2	Podina	1	6.1	6.1
3	Rigidizare	6	0.8	4.8
4	Diagonala	6	1.7	10.2
5	Scara 4 trepte	2	3.8	7.6
6	Scara 7 trepte	2	4.8	9.6
7	Estacada	4	3.1	12.4

Caracteristici generale:- platforma este prevazuta cu trapa de acces- distanta intre trepte: **280 mm**- dimensiuni platforma: **1300x500 mm**- la **ESRE 5.8** roti cu frana, diametrul de **125 mm**- la **ESRE 5.7** roti fixe, diametrul de **75 mm**- suruburi cu piulite fluture

