

Scara cu podina RARIS, fixa, la 45 grade, profile aluminiu sistem, tip ETPS 45



- executie conform normei **EN ISO 14122 si EN131**
- panta de urcare: **45 grade**
- material: profile sistem aluminiu **AlMgSi**
- elementele de asamblare: **otel zincat**
- greutatea maxima suportata :

a) pe produs: **300 kg**

b) pe o treapta: **200 kg**

- adancimea podinii: **700 mm** (latimea egala cu cea a treptelor)
- inaltimea maxima de lucru: **H + 2 metri** (H este inaltimea podinii considerata si ultima treapta de sus)
- **H = 840 -:- 3780 mm**
- **L = 1050 -:- 3990 mm**
- Numar trepte = **4 -:- 18**

OBS1: In TABEL, la pozitia "Nr trepte", se considera si podina ca treapta


OBS2: Produsul trebuie incastrat in pardosea si in peretii de sprijin (in partea superioara) printr-un sistem de corniere zincate puse la dispozitie de producator.

Cod produs	Inaltime scara[mm]	Ampronta orizontala scara[mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
ETPS4564	840	840	4	35.6	2.84
ETPS4565	1050	1050	5	39.7	3.05
ETPS4566	1260	1260	6	43.8	3.26
ETPS4567	1470	1470	7	47.2	3.47
ETPS4568	1680	1680	8	51.3	3.68
ETPS4569	1890	1890	9	55.4	3.89
ETPS45610	2100	2100	10	59.5	4.10
ETPS45611	2310	2310	11	63.6	4.31
ETPS45612	2520	2520	12	67.7	4.52
ETPS45613	2730	2730	13	71.1	4.73
ETPS45614	2940	2940	14	75.3	4.94
ETPS45615	3150	3150	15	79.3	5.15
ETPS45616	3360	3360	16	83.4	5.36
ETPS45617	3570	3570	17	86.8	5.57
ETPS45618	3780	3780	18	89.6	5.78
Cod produs	Inaltime scara [mm]	Ampronta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
ETPS4584	840	840	4	37.7	2.84
ETPS4585	1050	1050	5	41.8	3.05
ETPS4586	1260	1260	6	45.8	3.26

Scara cu podina RARIS, fixa, la 45 grade, profile aluminiiu sistem, tip ETPS 45

ETPS4587	1470	1470	7	46.9	3.47
ETPS4588	1680	1680	8	54.0	3.68
ETPS4589	1890	1890	9	58.8	3.89
ETPS45810	2100	2100	10	62.9	4.10
ETPS45811	2310	2310	11	67.0	4.31
ETPS45812	2520	2520	12	71.8	4.52
ETPS45813	2730	2730	13	75.9	4.73
ETPS45814	2940	2940	14	80.1	4.94
ETPS45815	3150	3150	15	84.1	5.15
ETPS45816	3360	3360	16	88.9	5.36
ETPS45817	3570	3570	17	93.0	5.57
ETPS45818	3780	3780	18	97.1	5.78
Cod produs	Inaltime scara [mm]	Amprenta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
ETPS45104	840	840	4	39.0	2.84
ETPS45105	1050	1050	5	43.8	3.05
ETPS45106	1260	1260	6	48.6	3.26
ETPS45107	1470	1470	7	53.3	3.47
ETPS45108	1680	1680	8	58.2	3.68
ETPS45109	1890	1890	9	62.3	3.89
ETPS451010	2100	2100	10	67.0	4.10
ETPS451011	2310	2310	11	71.8	4.31
ETPS451012	2520	2520	12	76.6	4.52
ETPS451013	2730	2730	13	81.3	4.73
ETPS451014	2940	2940	14	86.2	4.94
ETPS451015	3150	3150	15	90.9	5.15
ETPS451016	3360	3360	16	95.0	5.36
ETPS451017	3570	3570	17	99.8	5.57
ETPS451018	3780	3780	18	104.6	5.78

Caracteristici produs:

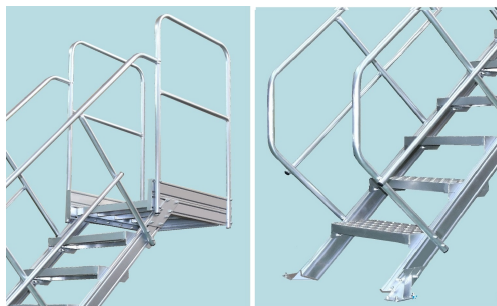

Caracteristici:- latime trepte si podina : 600 / 800 / 1000
mm- grosime trepte: 40 mm- adancime trepte: 240 mm-
distanța între două trepte consecutive a) pe verticala: 210
mm b) pe orizontala: 210 mm- inaltime balustrade: 700
mm (perpendicular pe scara)