


Scara cu podina RARIS, fixa, la 60 grade, profile aluminiu sistem, tip ETPS60

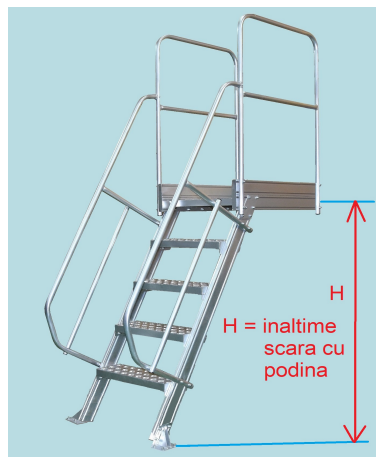

- executie conform normei **EN ISO 14122 si EN131**
- panta de urcare: **60 grade**
- material: profile sistem aluminiu **AlMgSi**
- elementele de asamblare: **otel zincat**
- greutatea maxima suportata :

a) pe produs: **300 kg**

b) pe o treapta: **200 kg**

- adancimea podinii: **700 mm** (latimea egala cu cea a treptelor)
- inaltimea maxima de lucru: **H + 2 metri** (H este inaltimea podinii considerata si ultima treapta de sus)
- **H = 1000 -:- 4500 mm;**
- **L = 725 -:- 2755 mm;**
- **Nr. trepte = 4 -:- 18.**

OBS1: In TABEL, la pozitia "Nr trepte", se considera si podina ca treapta

OBS2: Produsul trebuie incastrat la baza si in partea superioara printr-un SISTEM DE FIXARE pus la dispozitie de producator si executat dupa consultari cu beneficiarul scarii

Cod produs	Inaltime scara[mm]	Ampronta orizontala scara[mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
ETPS6064	1000	580	4	32.9	3.00
ETPS6065	1250	725	5	36.0	3.25
ETPS6066	1500	870	6	39.2	3.50
ETPS6067	1750	1015	7	42.5	3.75
ETPS6068	2000	1160	8	45.7	4.00
ETPS6069	2250	1350	9	48.9	4.25
ETPS60610	2500	1450	10	52.0	4.50
ETPS60611	2750	1595	11	55.2	4.75
ETPS60612	3000	1740	12	58.4	5.00
ETPS60613	3250	1885	13	61.6	5.25
ETPS60614	3500	2030	14	64.9	5.50
ETPS60615	3750	2175	15	68.0	5.75
ETPS60616	4000	2320	16	71.2	6.00
ETPS60617	4250	2465	17	74.4	6.25
ETPS60618	4500	2610	18	77.6	6.50

Cod produs	Inaltime scara [mm]	Ampronta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
ETPS6084	1000	580	4	34.5	3.00
ETPS6085	1250	725	5	39.2	3.25
ETPS6086	1500	870	6	42.5	3.50

Scara cu podina RARIS, fixa, la 60 grade, profile aluminii sistem, tip ETPS60

ETPS6087	1750	1015	7	45.7	3.75
ETPS6088	2000	1160	8	49.5	4.00
ETPS6089	2250	1305	9	53.7	4.25
ETPS60810	2500	1450	10	56.9	4.50
ETPS60811	2750	1595	11	60.0	4.75
ETPS60812	3000	1740	12	64.9	5.00
ETPS60813	3250	1885	13	68.0	5.25
ETPS60814	3500	2030	14	71.2	5.50
ETPS60815	3750	2175	15	76.0	5.75
ETPS60816	4000	2320	16	79.2	6.00
ETPS60817	4250	2465	17	82.4	6.25
ETPS60818	4500	2610	18	87.2	6.50
Cod produs	Inaltime scara [mm]	Amprenta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
ETPS60104	1000	725	4	36.0	3.00
ETPS60105	1250	870	5	40.9	3.25
ETPS60106	1500	1015	6	45.7	3.50
ETPS60107	1750	1160	7	48.9	3.75
ETPS60108	2000	1305	8	53.7	4.00
ETPS60109	2250	1450	9	58.4	4.25
ETPS601010	2500	1595	10	61.6	4.50
ETPS601011	2750	1740	11	66.5	4.75
ETPS601012	3000	1885	12	71.2	5.00
ETPS601013	3250	2030	13	74.4	5.25
ETPS601014	3500	2175	14	79.2	5.50
ETPS601015	3750	2320	15	83.9	5.75
ETPS601016	4000	2465	16	87.2	6.00
ETPS601017	4250	2610	17	91.9	6.25
ETPS601018	4500	2755	18	96.8	6.50

Caracteristici produs:



Caracteristici:- latime trepte si podina: 600 / 800 / 1000
mm- grosime trepte: 40 mm- adancime trepte: 175 mm-
distanta intre doua trepte consecutive a) pe verticala: 250
mm b) pe orizontala: 145 mm- inaltime
balustrade: 500 mm (perpendicular pe scara)- material
suprafata trepte si podina: aluminiu striat