

Platforma mobila RARIS, profile aluminiu sistem, la 45⁰, dubla, Gmax = 400 kg, tip PPD45



- executie conform normei EN ISO 14122 si SR EN 131-7
- panta de urcare: 45 grade
- lonjeroane , balustrazi, suportii : aluminiu AlMgSi
- elementele de asamblare : otel zincat sau vopsit in pulbere
- greutatea maxima suportata :

a) pe podina: 400 kg

b) pe o treapta: 200 kg

- dimensiuni podina: (latime trepte) x 700 mm
- roti pivotante cu frana de diametrul 125 mm
- suprafata podinii si a treptelor: aluminiu striat

OBS: La comanda speciala se poate alege suprafata treptelor si a podinii din:

- tabla expandata
- gratar de aluminiu
- gratar de otel zincat
- teo antiderapant


OBS: In TABEL, la pozitia "Nr trepte", se considera si podina ca treapta

Cod produs	Inaltime scara[mm]	Ampronta orizontala scara[mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPD4564	840	840	4	61.7	2.84
PPD4565	1050	1050	5	71.0	3.05
PPD4566	1260	1260	6	80.3	3.26
PPD4567	1470	1470	7	88.3	3.47
PPD4568	1680	1680	8	97.7	3.68
PPD4569	1890	1890	9	107.1	3.89
PPD45610	2100	2100	10	116.4	4.10
PPD45611	2310	2310	11	125.8	4.31
PPD45612	2520	2520	12	135.1	4.52
PPD45613	2730	2730	13	143.1	4.73
PPD45614	2940	2940	14	152.6	4.94
PPD45615	3150	3150	15	161.8	5.15
PPD45616	3360	3360	16	171.2	5.36
PPD45617	3570	3570	17	179.1	5.57
PPD45618	3780	3780	18	185.8	5.78
Cod produs	Inaltime scara [mm]	Ampronta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPD4584	840	840	4	65.8	2.84
PPD4585	1050	1050	5	75.2	3.05
PPD4586	1260	1260	6	84.4	3.26

Platforma mobila RARIS, profile aluminiu sistem, la 45⁰, dubla, Gmax = 400 kg, tip PPD45

PPD4587	1470	1470	7	90.8	3.47
PPD4588	1680	1680	8	103.1	3.68
PPD4589	1890	1890	9	113.9	3.89
PPD45810	2100	2100	10	123.2	4.10
PPD45811	2310	2310	11	132.6	4.31
PPD45812	2520	2520	12	143.4	4.52
PPD45813	2730	2730	13	152.7	4.73
PPD45814	2940	2940	14	162.2	4.94
PPD45815	3150	3150	15	171.4	5.15
PPD45816	3360	3360	16	182.2	5.36
PPD45817	3570	3570	17	191.5	5.57
PPD45818	3780	3780	18	200.8	5.78
Cod produs	Inaltime scara [mm]	Amprenta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPD45104	840	840	4	68.5	2.84
PPD45105	1050	1050	5	79.2	3.05
PPD45106	1260	1260	6	90.0	3.26
PPD45107	1470	1470	7	100.6	3.47
PPD45108	1680	1680	8	111.5	3.68
PPD45109	1890	1890	9	120.8	3.89
PPD451010	2100	2100	10	131.4	4.10
PPD451011	2310	2310	11	142.2	4.31
PPD451012	2520	2520	12	152.9	4.52
PPD451013	2730	2730	13	163.5	4.73
PPD451014	2940	2940	14	174.4	4.94
PPD451015	3150	3150	15	185.0	5.15
PPD451016	3360	3360	16	194.3	5.36
PPD451017	3570	3570	17	205.1	5.57
PPD451018	3780	3780	18	215.8	5.78

Caracteristici produs:

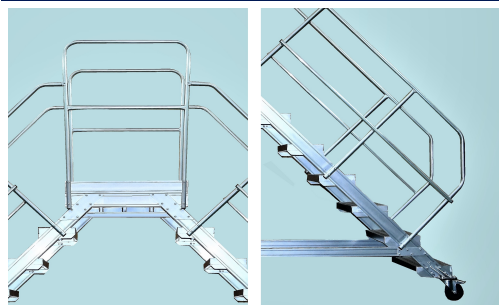

Caracteristici: - latime trepte si podina (inclusiv lonjeroanele laterale): **600/800/100 mm** - adancime trepte: **240 mm** - distanta intre doua trepte consecutive a) pe verticala: **210 mm** b) pe orizontala: **210 mm** - inaltime balustrade podina: **1000 mm**