

Platforma mobila RARIS, profile aluminiu sistem, la 60⁰, dubla, Gmax=400 kg, tip PPD60



- executie conform normei EN ISO 14122 si SR EN 131-7
- panta de urcare: 60 grade
- lonjeroane , balustrazi, suportii : aluminiu AlMgSi
- elementele de asamblare : otel zincat sau vopsit in pulbere
- greutatea maxima suportata :

a) pe podina: 400 kg

b) pe o treapta: 200 kg

- dimensiuni podina: (latime trepte) x 700 mm
- roti pivotante cu frana de diametrul 125 mm
- suprafata podinii si a treptelor: aluminiu striat

OBS: La comanda speciala se poate alege suprafata treptelor si a podinii din:

- tabla expandata

- gratar de aluminiu

- gratar de otel zincat


- tegu antiderapant OBS: In TABEL, la pozitia "Nr trepte", se considera si podina ca treapta

Cod produs	Inaltime scara[mm]	Amprenta orizontala scara[mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPD6064	1000	580	4	55.6	3.00
PPD6065	1250	725	5	62.6	3.25
PPD6066	1500	870	6	69.8	3.50
PPD6067	1750	1015	7	77.0	3.75
PPD6068	2000	1160	8	84.3	4.00
PPD6069	2250	1350	9	91.5	4.25
PPD60610	2500	1450	10	98.5	4.50
PPD60611	2750	1595	11	105.7	4.75
PPD60612	3000	1740	12	113.0	5.00
PPD60613	3250	1885	13	120.2	5.25
PPD60614	3500	2030	14	127.4	5.50
PPD60615	3750	2175	15	134.4	5.75
PPD60616	4000	2320	16	141.6	6.00
PPD60617	4250	2465	17	148.9	6.25
PPD60618	4500	2610	18	156.1	6.50
Cod produs	Inaltime scara [mm]	Amprenta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPD6084	1000	580	4	58.7	3.00
PPD6085	1250	725	5	69.0	3.25
PPD6086	1500	870	6	76.3	3.50

Platforma mobila RARIS, profile aluminiu sistem, la 60⁰, dubla, Gmax=400 kg, tip PPD60

PPD6087	1750	1015	7	83.5	3.75
PPD6088	2000	1160	8	92.2	4.00
PPD6089	2250	1305	9	101.0	4.25
PPD60810	2500	1450	10	108.3	4.50
PPD60811	2750	1595	11	115.3	4.75
PPD60812	3000	1740	12	125.8	5.00
PPD60813	3250	1885	13	132.8	5.25
PPD60814	3500	2030	14	140.1	5.50
PPD60815	3750	2175	15	150.4	5.75
PPD60816	4000	2320	16	157.6	6.00
PPD60817	4250	2465	17	164.8	6.25
PPD60818	4500	2610	18	175.2	6.50
Cod produs	Inaltime scara [mm]	Amprenta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPD60104	1000	725	4	61.8	3.00
PPD60105	1250	870	5	72.3	3.25
PPD60106	1500	1015	6	82.7	3.50
PPD60107	1750	1160	7	89.9	3.75
PPD60108	2000	1305	8	100.2	4.00
PPD60109	2250	1450	9	110.6	4.25
PPD601010	2500	1595	10	117.8	4.50
PPD601011	2750	1740	11	128.3	4.75
PPD601012	3000	1885	12	138.5	5.00
PPD601013	3250	2030	13	145.7	5.25
PPD601014	3500	2175	14	156.0	5.50
PPD601015	3750	2320	15	166.4	5.75
PPD601016	4000	2465	16	173.6	6.00
PPD601017	4250	2610	17	183.9	6.25
PPD601018	4500	2755	18	194.4	6.50

Caracteristici produs:

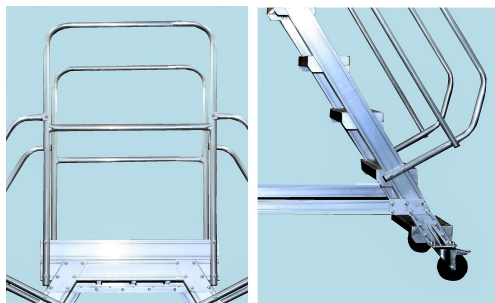

Caracteristici: - latime trepte si podina (inclusiv lonjeroanele laterale): **600/800/100 mm** - adancime trepte: **175 mm** - distanta intre doua trepte consecutive a) pe verticala: **250 mm** b) pe orizontala: **145 mm** - inaltime balustrade podina: **1000 mm**