


Platforma fixa RARIS, profile aluminiu sistem, 60 grade, dubla, Gmax = 400 kg - tip PPDF60

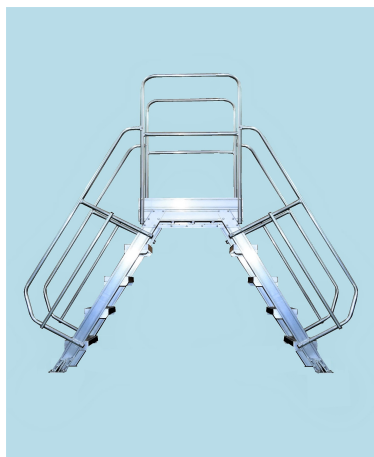

- executie conform normei **EN ISO 14122** si **SR EN 131-7**
- panta de urcare: **60 grade**
- lonjeroane , balustrazi, suporti : aluminiu **AlMgSi**
- elementele de asamblare : **otel zincat** sau vopsit in **pulbere**
- greutatea maxima suportata :

a) pe podina: **400 kg**

b) pe o treapta: **200 kg**

- dimensiuni podina: **(latime trepte) x 700 mm**

•

- suprafata podinii si a treptelor: **aluminiu striat**

OBS: La comanda speciala se poate alege suprafata treptelor si a podinii din:

- **tabla expandata**
- **gratar de aluminiu**
- **gratar de otel zincat**
- **tego antiderapant**

OBS1: In TABEL, la pozitia "Nr trepte", se considera si podina ca treapta

OBS2: Produsul trebuie incastrat in pardosea printr-un sistem de corniere zincate puse la dispozitie de producator.




Cod produs	Inaltime scara[mm]	Ampranta orizontala scara[mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPDF6064	1000	580	4	47.3	3.00
PPDF6065	1250	725	5	53.6	3.25
PPDF6066	1500	870	6	60.0	3.50
PPDF6067	1750	1015	7	66.4	3.75
PPDF6068	2000	1160	8	72.8	4.00
PPDF6069	2250	1350	9	79.3	4.25
PPDF60610	2500	1450	10	85.5	4.50
PPDF60611	2750	1595	11	91.9	4.75
PPDF60612	3000	1740	12	98.4	5.00
PPDF60613	3250	1885	13	104.8	5.25
PPDF60614	3500	2030	14	111.2	5.50
PPDF60615	3750	2175	15	117.4	5.75
PPDF60616	4000	2320	16	123.9	6.00
PPDF60617	4250	2465	17	130.3	6.25
PPDF60618	4500	2610	18	136.7	6.50

Cod produs	Inaltime scara [mm]	Ampranta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPDF6084	1000	580	4	50.4	3.00
PPDF6085	1250	725	5	60.0	3.25
PPDF6086	1500	870	6	66.4	3.50
PPDF6087	1750	1015	7	72.8	3.75
PPDF6088	2000	1160	8	80.8	4.00
PPDF6089	2250	1305	9	88.8	4.25
PPDF60810	2500	1450	10	95.2	4.50
PPDF60811	2750	1595	11	101.5	4.75
PPDF60812	3000	1740	12	111.2	5.00
PPDF60813	3250	1885	13	117.4	5.25
PPDF60814	3500	2030	14	123.9	5.50
PPDF60815	3750	2175	15	133.4	5.75
PPDF60816	4000	2320	16	139.8	6.00
PPDF60817	4250	2465	17	146.3	6.25
PPDF60818	4500	2610	18	155.8	6.50

Cod produs	Inaltime scara [mm]	Ampranta orizontala scara [mm]	Nr. trepte	Masa [kg]	Inaltime max. de lucru [m]
PPDF60104	1000	725	4	53.6	3.00

PPDF60105	1250	870	5	63.3	3.25
PPDF60106	1500	1015	6	72.8	3.50
PPDF60107	1750	1160	7	79.3	3.75
PPDF60108	2000	1305	8	88.8	4.00
PPDF60109	2250	1450	9	98.4	4.25
PPDF601010	2500	1595	10	104.8	4.50
PPDF601011	2750	1740	11	114.5	4.75
PPDF601012	3000	1885	12	123.9	5.00
PPDF601013	3250	2030	13	130.3	5.25
PPDF601014	3500	2175	14	139.8	5.50
PPDF601015	3750	2320	15	149.4	5.75
PPDF601016	4000	2465	16	155.8	6.00
PPDF601017	4250	2610	17	165.4	6.25
PPDF601018	4500	2755	18	175.1	6.50

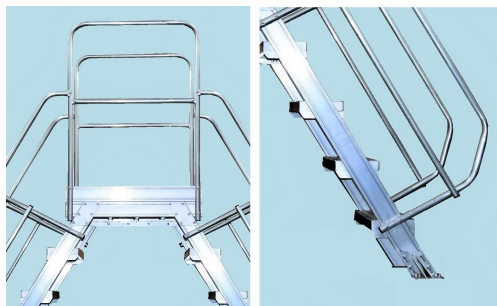Caracteristici produs:

Caracteristici: latime trepte si podina (inclusiv lonjeroanele laterale): **600/800/100 mm** - adancime trepte: **175 mm**- distanta intre doua trepte consecutive a) pe verticala: **250 mm** b) pe orizontala: **145 mm**- inaltime balustrade podina: **1000 mm**