

Platforma RARIS la 45 grade cu podina extinsa, profile sistem - tip MAPS




- executie conf. normei **EN ISO 14122 si SR EN 131-7**
- balustrade, legaturi : **aluminiu AIMgSi**
- lonjeroane, stalpi, rigidizari : **profile aluminiu sistem AIMgSi**
- **INALTIMEA DE LUCRU MAX. = Hpodina +2 metri**
- greutatea maxima suportata :

- a) pe podini: **400 kg**
- b) pe o treapta: **200 kg**
 - roti pivotante cu frana de diametrul
- a) **125 mm** la scara
- b) **200 mm** sub podina
 - reglare inaltime roti (pentru planeitate): **20 mm**
 - **PODINA SI TREPTILE** pot avea suprafata din:
- a) **Aluminiu striat 2 mm**
- b) **Tabla otel expandata 3mm**
- c) **Tego antiderapant 10 mm**
- d) **Gratar aluminiu ochiuri 30 x 30 mm**
- e) **Gratar otel ochiuri 30 x 30 mm**



Caracteristici produs:

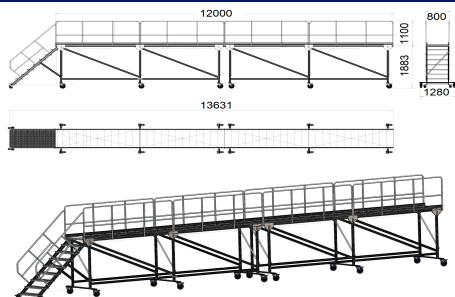

Caracteristici:

- latime trepte si podina (uzual): **600/800/100 mm**
- adancime trepte: **240 mm**
- distanta intre doua trepte consecutive
 - a) pe verticala (panta scarii 45 gr): **210 mm**
 - b) pe orizontala (panta scarii 45 gr): **210 mm**
- inaltime balustrade podina: **1000 mm**
- adancime podina (uzual): **700 mm**
(sau alta dimensiune la comanda)

