

## Platforma RARIS pentru mentenanta luminatoare in hale industriale, tip MAPL




- executie conf. normei **EN ISO 14122** si **SR EN 131-7**
  - lonjeroane, balustrade, legaturi : **aluminiu AIMgSi**
  - INALTIMEA DE LUCRU MAX. = **Hpodina +2 metri**
  - greutatea maxima suportata :
- a) pe podini: **300 kg**  
b) pe o treapta: **300 kg**
- roti pivotante cu frana de diametrul **200 mm**
  - suruburi de calare reglabile pe **30 cm**
  - **PODINA SI TREPTELE** au suprafetele din:
- a) **Aluminiu striat 2 mm**  
b) **Tabla otel expandata 3mm**  
c) **Tego antiderapant 10 mm**  
d) **Gratar aluminiu antiderapant**  
e) **Gratar otel antiderapant**



### Caracteristici produs:

PLATFORMA LUMINATOR

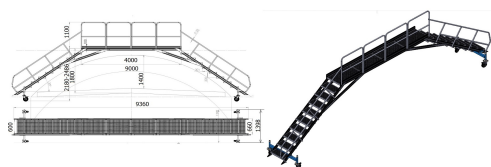

**Caracteristici:**- panta scarilor: **35 grade**- latime trepte si podina: **600 mm**- adancime trepte: **300 mm**- distanta intre trepte: **200 mm**- greutatea platformei: **225 kg**- lungime platforma: **9360 mm**-inaltime podina: **reglabila de la 2180 la 1486 mm**

