

Platforma fixa RARIS, profile aluminiu sistem, la 45 grade, Gmax = 400 kg - tip PPF45



- executie conform normei EN ISO 14122 si EN131
- panta de urcare: 45 grade
- material: profile sistem aluminiu AlMgSI
- elementele de asamblare: otel zincat
- greutatea maxima suportata :
 - a) pe produs: 400 kg
 - b) pe o treapta: 200 kg
 - adancimea podinii: 700 mm (latimea egala cu cea a treptelor)
 - inaltimea maxima de lucru: H + 2 metri (H este inaltimea podinii considerata si ultima treapta de sus)

H = 840 -:- 3780 mm

L = 1050 -:- 3990 mm

- Numar trepte = 4 -:- 18

OBS1: In TABEL, la pozitia "Nr trepte", se considera si podina ca treapta

OBS2: Produsul trebuie incastrat in pardosea printr-un sistem de corniere zincate puse la dispozitie de producator.

PPF45A64	4	0,8	1,9	1,5	38.4	2.8
PPF45A65	5	1,0	2,1	1,7	43.2	3.0
PPF45A66	6	1,2	2,3	2,0	48.0	3.2
PPF45A67	7	1,4	2,5	2,2	52.8	3.4
PPF45A68	8	1,6	2,7	2,4	57.7	3.6
PPF45A69	9	1,9	3,0	2,6	64.3	3.9
PPF45A610	10	2,1	3,2	2,8	69.1	4.1
PPF45A611	11	2,3	3,4	3,0	73.9	4.3
PPF45A612	12	2,5	3,6	3,2	78.7	4.5
PPF45A613	13	2,7	3,8	3,4	83.5	4.7
PPF45A614	14	2,9	4,0	3,6	90.1	4.9
PPF45A615	15	3,1	4,2	3,8	94.9	5.1
PPF45A616	16	3,3	4,4	4,1	99.7	5.3
PPF45A617	17	3,5	4,6	4,3	104.5	5.5
PPF45A618	18	3,7	4,8	4,5	109.3	5.7

PPF45T64	4	0,8	1,9	1,5	40.6	2.8
PPF45T65	5	1,0	2,1	1,7	46.5	3.0
PPF45T66	6	1,2	2,3	2,0	52.3	3.2
PPF45T67	7	1,4	2,5	2,2	58.2	3.4
PPF45T68	8	1,6	2,7	2,4	64.0	3.6
PPF45T69	9	1,9	3,0	2,6	71.7	3.9
PPF45T610	10	2,1	3,2	2,8	77.6	4.1

**Platforma fixa RARIS, profile aluminiu sistem, la 45
grade, Gmax = 400 kg - tip PPF45**

PPF45T611	11	2,3	3,4	3,0	83.4	4.3
PPF45T612	12	2,5	3,6	3,2	89.3	4.5
PPF45T613	13	2,7	3,8	3,4	95.1	4.7
PPF45T614	14	2,9	4,0	3,6	102.8	4.9
PPF45T615	15	3,1	4,2	3,8	108.7	5.1
PPF45T616	16	3,3	4,4	4,1	114.5	5.3
PPF45T617	17	3,5	4,6	4,3	120.4	5.5
PPF45T618	18	3,7	4,8	4,5	126.2	5.7


PPF45G64	4	0,8	1,9	1,5	37.2	2.8
PPF45G65	5	1,0	2,1	1,7	41.8	3.0
PPF45G66	6	1,2	2,3	2,0	46.4	3.2
PPF45G67	7	1,4	2,5	2,2	50.9	3.4
PPF45G68	8	1,6	2,7	2,4	55.5	3.6
PPF45G69	9	1,9	3,0	2,6	61.9	3.9
PPF45G610	10	2,1	3,2	2,8	66.4	4.1
PPF45G611	11	2,3	3,4	3,0	71.0	4.3
PPF45G612	12	2,5	3,6	3,2	75.6	4.5
PPF45G613	13	2,7	3,8	3,4	80.1	4.7
PPF45G614	14	2,9	4,0	3,6	86.5	4.9
PPF45G615	15	3,1	4,2	3,8	91.1	5.1
PPF45G616	16	3,3	4,4	4,1	95.7	5.3
PPF45G617	17	3,5	4,6	3,3	100.2	5.5
PPF45G618	18	3,7	4,8	4,5	104.8	5.7
PPF45T106	6	1.2	2.3	2.0	66.7	3.2
PPF45T107	7	1.4	2.5	2.2	74.6	3.4
PPF45T108	8	1.6	2.7	2.4	82.5	3.6
PPF45T109	9	1.9	3.0	2.6	92.6	3.9
PPF45T1010	10	2.1	3.2	2.8	100.5	4.1
PPF45T1011	11	2.3	3.4	3.0	108.4	4.3
PPF45T1012	12	2.5	3.6	3.2	116.3	4.5
PPF45T1013	13	2.7	3.8	3.4	124.2	4.7
PPF45T1014	14	2.9	4.0	3.6	134.4	4.9
PPF45T1015	15	3.1	4.2	3.8	142.3	5.1
PPF45T1016	16	3.3	4.4	4.1	150.2	5.3
PPF45T1017	17	3.5	4.6	4.3	158.1	5.5
PPF45T1018	18	3.7	4.8	4.5	166.0	5.7

PPF45G104	4	0.8	1.9	1.5	50.8	2.8
PPF45G105	5	1.0	2.1	1.7	58.8	3.0
PPF45G106	6	1.2	2.3	2.0	66.7	3.2
PPF45G107	7	1.4	2.5	2.2	74.6	3.4
PPF45G108	8	1.6	2.7	2.4	82.5	3.6

Platforma fixa RARIS, profile aluminiu sistem, la 45 grade, Gmax = 400 kg - tip PPF45

PPF45G109	9	1.9	3.0	2.6	92.6	3.9
PPF45G1010	10	2.1	3.2	2.8	100.5	4.1
PPF45G1011	11	2.3	3.4	3.0	108.4	4.3
PPF45G1012	12	2.5	3.6	3.2	116.3	4.5
PPF45G1013	13	2.7	3.8	3.4	124.2	4.7
PPF45G1014	14	2.9	4.0	3.6	134.4	4.9
PPF45G1015	15	3.1	4.2	3.8	142.3	5.1
PPF45G1016	16	3.3	4.4	4.1	150.2	5.3
PPF45G1017	17	3.5	4.6	4.3	158.1	5.5
PPF45G1018	18	3.7	4.8	4.5	166.0	5.7

Caracteristici produs:

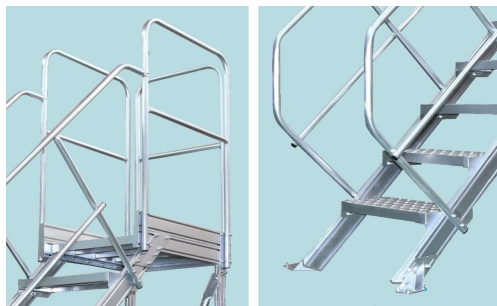

Caracteristici:- latime trepte si podina : 600 / 800 / 1000 mm- grosime trepte: 40 mm- adancime trepte: 240 mm- distanta intre doua trepte consecutive a) pe verticala: 210 mm b) pe orizontala: 210 mm- inaltime balustrade: 700 mm (perpendicular pe scara)