

Platforma RARIS, la 60 ⁰, mobila, din otel, cu blocarea pe roata, tip PO



- executie conf. normei **EN ISO 14122** si **SR EN 131-7**
- panta de urcare: **60 grade**
- lonjeroane, balustrade, legaturi : **otel vopsit in pulbere**
- greutatea maxima suportata :

- a) pe podina: **300 kg**
- b) pe o treapta: **150 kg**

- **roti pivotante** (2 fara frana si 2 cu frana) de diametrul **125 mm**
- spatiu depozitare si transport sub platforma
- **FUNCIE DE LATIMEA PLATFORMEI** avem:

1. Latime de **60 cm** => Cod produs **PO60**
2. Latime de **80 cm** => Cod produs **PO80**
3. Latime de **100 cm** => Cod produs **PO100**

- **PODINA SI TREPTELE** au suprafetele din:

1. **Aluminiu striat 2 mm** (cod PO....**A**)
2. **Tabla otel expandata 2 mm** (cod PO....**T**)
3. **Tego antiderapant 10 mm** (cod PO....**G**)




Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO60A5	5	1.1	2.1	1.4	55	3.1
PO60A8	8	1.9	2.9	1.8	72	3.9
PO60A11	11	2.6	3.6	2.3	101	4.6
PO60A14	14	3.4	4.4	2.7	123	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO60T5	5	1.1	2.1	1.4	63	3.1
PO60T8	8	1.9	2.9	1.8	81	3.9
PO60T11	11	2.6	3.6	2.3	111	4.6
PO60T14	14	3.4	4.4	2.7	134	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO60G5	5	1.1	2.1	1.4	54.2	3.1
PO60G8	8	1.9	2.9	1.8	70.9	3.9
PO60G11	11	2.6	3.6	2.3	99.6	4.6
PO60G14	14	3.4	4.4	2.7	121.3	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO80A5	5	1.1	2.1	1.4	68	3.1
PO80A8	8	1.9	2.9	1.8	93	3.9
PO80A11	11	2.6	3.6	2.3	121	4.6
PO80A14	14	3.4	4.4	2.7	146	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO80T5	5	1.1	2.1	1.4	78	3.1
PO80T8	8	1.9	2.9	1.8	105	3.9
PO80T11	11	2.6	3.6	2.3	135	4.6
PO80T14	14	3.4	4.4	2.7	161	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO80G5	5	1.1	2.1	1.4	67.0	3.1
PO80G8	8	1.9	2.9	1.8	91.7	3.9
PO80G11	11	2.6	3.6	2.3	119.3	4.6
PO80G14	14	3.4	4.4	2.7	144.0	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]

Platforma RARIS, la 60 ⁰, mobila, din otel, cu blocarea pe roata, tip PO

PO100A5	5	1.1	2.1	1.4	81	3.1
PO100A8	8	1.9	2.9	1.8	114	3.9
PO100A11	11	2.6	3.6	2.3	141	4.6
PO100A14	14	3.4	4.4	2.7	169	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO100T5	5	1.1	2.1	1.4	93	3.1
PO100T8	8	1.9	2.9	1.8	129	3.9
PO100T11	11	2.6	3.6	2.3	159	4.6
PO100T14	14	3.4	4.4	2.7	188	5.4
Cod produs	Nr trepte	Inaltime podina [m]	Inaltime totala [m]	Lungime [m]	Masa [kg]	Inaltime max. de lucru [m]
PO100G5	5	1.1	2.1	1.4	79.8	3.1
PO100G8	8	1.9	2.9	1.8	112.4	3.9
PO100G11	11	2.6	3.6	2.3	139.1	4.6
PO100G14	14	3.4	4.4	2.7	166.7	5.4

Caracteristici produs:

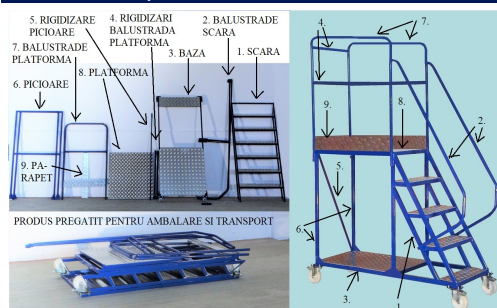

Caracteristici generale:

- adancime podina: **700 mm**
- adancime trepte: **175 mm**
- distanta intre 2 trepte consecutive:
 - a) pe verticala: **250 mm**
 - b) pe orizontala: **144 mm**
- inaltime balustrada scara: **700 mm**
- inaltime balustrada podina: **1000 mm**