

Scara mobila cu platforma, din aluminiu, la 70 grade, roti laterale, produs RARIS, tip PSA




- executie conform normei **SR EN 131-7**
- panta de urcare: **70 grade**
- material lonjeroane si suporti: aluminiu **AlMgSi**
- material trepte: **aluminiu nervurat** (pentru evitarea alunecarii)
- material platforma: **aluminiu striat** (pentru aderenta sporita in lucru)
- greutatea maxima suportata :
 - **200 kg** pe treapta
 - **300 kg** pe platforma
- treptele au adancimea de **80 mm** si sunt asigurate suplimentar cu trepte de **28 x 28 mm** incastrate in lonjeroanele scarii



Tip	Nr. trepte	Inaltime platforma [m]	Inaltime totala [m]	Lungime scara [m]	Lungime traversa baza [m]	Masa [kg]	Inaltime max. aprox. lucru [m]
PSA3	3	0,8	1,9	1,2	0,8	15,0	2.8
PSA4	4	1,0	2,1	1,3	0,8	16,5	3.0
PSA5	5	1,3	2,4	1,4	1,0	18,0	3.3
PSA6	6	1,5	2,6	1,5	1,0	19,5	3.5
PSA7	7	1,8	2,9	1,6	1,0	21,0	3.8
PSA8	8	2,1	3,2	1,7	1,2	22,5	4.1
PSA9	9	2,3	3,4	1,8	1,2	24,0	4.3
PSA10	10	2,6	3,7	1,9	1,2	25,5	4.6



Caracteristici produs:

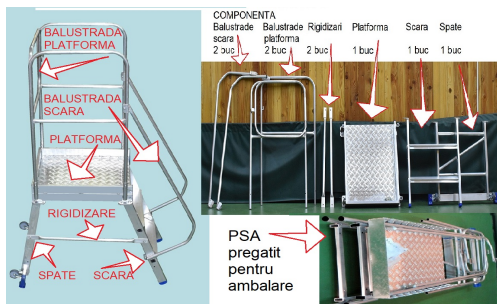

Caracteristici generale:

- In tabel la "**Numar trepte**" se considera si platforma
- latime trepte si platforma: **600 mm**
- adancime platforma: **700 mm** (sau alta dimensiune la comanda)
- grosime trepte: **30 mm**
- adancime trepte: **80 mm**
- inaltime balustrade: **500 mm** (perpendiculara pe scara)
- inaltime balustrada platforma: **1100 mm**
- diametrul rotilor de deplasare : **75 mm**

