



Miniplatforme RARIS, cu balamale articulate si trepte late, tip MPBA




executie conform normei **SR EN 131-7**
 panta de urcare: **70 grade**
 material lonjeroane si suport: aluminiu **AlMgSi**
 material trepte: **aluminiu nervurat** (pentru evitarea alunecarii)
 material platforma: **tego antiderapant** (pentru aderenta sporita in lucru)
 greutate maxima suportata :
 - **300 kg pe platforma**
 • treptele au adancimea de **80 mm** si sunt asigurate suplimentar cu trepte de **28 x 28 mm** incastrate in lonjeroanele scarii
 • grosime tego : **10 mm**
 inaltime axima de lucru : **Hmax.= Inaltime Platforma + 2 m**

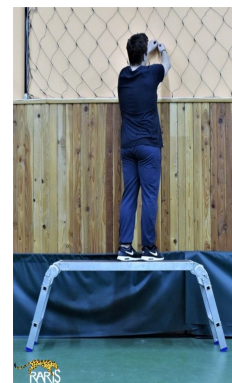

Tip	Nr. trepte	Inaltime platforma [m]	Masa [kg]	Amprenta la sol {m}x{m}	Inaltime max. de lucru [m]
MPBA1	1 x 2	0,40	8,7	1,6 x 0,35	2.4
MPBA2	2 x 2	0.65	9,8	1,8 x 0,35	2.65
MPBA3	3 x 2	0,90	10,9	2,0 x 0,35	2.9

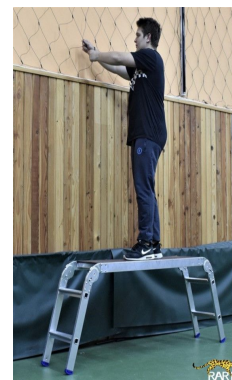

Caracteristici produs:

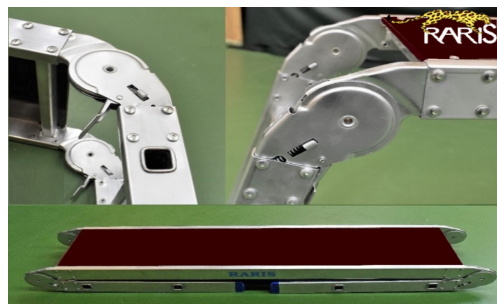

Caracteristici constructive- dimensiune platforma de lucru: **1,2 x 0,35 m**- grosime platforma stransa: **0,15 m**- lonjeroanele scarii: Aluminiu **61x23x1,2 mm**- lonjeroanele platformei: Aluminiu **61x23x1,7 mm**- sustinere tego: Aluminiu **40x20x1,2 mm**- trepte : Aluminiu **28x28 mm** - balamale articulate cu 2 pozitii si blocare automata

