




- executie conf. normei **EN ISO 14122** si **SR EN 131-7**
- lonjeroane, balustrade, legaturi : **aluminiiu AIMgSi**
- **INALTIMEA DE LUCRU MAX. = Hpodina +2 metri**
- greutatea maxima suportata :

- a) pe podini: **400 kg**
- b) pe o treapta: **200 kg**
 - roti pivotante cu frana de diametrul
- a) **125 mm** la scara
- b) **200 mm** sub podina
 - suruburi de calare reglabile pe **25 cm**
 - **PODINA SI TREPTILE** au suprafetele din:
 - a) **Aluminiiu striat 2 mm (cod MAMT...A)**
 - b) **Tabla otel expandata 3mm (cod MAMT....T)**
 - c) **Tego antiderapant 10 mm (cod MAMT....G)**
- **COMPONENTA PLATFORME:**
 - a) **BAZA**
 - b) **STALPI**
 - c) **PODINA CU TRAVERSE**
 - d) **SCARA**
 - e) **DIAGONALE SI RIGIDIZARI**
 - f) **BALUSTRADE DE SCARA SI DE PODINA**

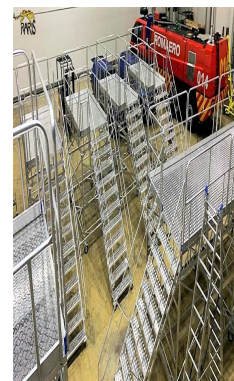

Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01A 10	2.5	6.0	2.0	410.0	4.5
MAMT 02A 10	2.5	4.0	2.0	336.0	4.5
MAMT 03A 10	2.5	2.6	1.5	235.5	4.5
MAMT 04A 10	4.0	4.0	1.5	389.5	6.0
MAMT 05A 10	3.2	4.0	2.0	390.8	5.2
MAMT 06A 10	2.9	2.6	1.5	226.0	4.9

Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01T 10	2.5	6.0	2.0	509.2	4.5
MAMT 02T 10	2.5	4.0	2.0	412.7	4.5
MAMT 03T 10	2.5	2.6	1.5	289.1	4.5
MAMT 04T 10	4.0	4.0	1.5	474.2	6.0
MAMT 05T 10	3.2	4.0	2.0	475.5	5.2
MAMT 06T 10	2.9	2.6	1.5	285.1	4.9

Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01G 10	2.5	6.0	2.0	406.5	4.5
MAMT 02G 10	2.5	4.0	2.0	334.6	4.5
MAMT 03G 10	2.5	2.6	1.5	236.2	4.5
MAMT 04G 10	4.0	4.0	1.5	390.8	6.0
MAMT 05G 10	3.2	4.0	2.0	390.1	5.2
MAMT 06G 10	2.9	2.6	1.5	227.1	4.9

Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01A 8	2.5	6.0	4.0	403.7	4.5
MAMT 02A 8	2.5	4.0	2.0	329.7	4.5
MAMT 03A 8	2.5	2.6	1.5	229.2	4.5
MAMT 04A 8	4.0	4.0	1.5	379.2	6.0
MAMT 05A 8	3.2	4.0	2.0	382.8	5.2
MAMT 06A 8	2.9	2.6	1.5	218.6	4.9


Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01A 6	2.5	6.0	2.0	397.5	4.5
MAMT 02A 6	2.5	4.0	2.0	323.5	4.5
MAMT 03A 6	2.5	2.6	1.5	223.0	4.5
MAMT 04A 6	4.0	4.0	1.5	369.0	6.0
MAMT 05A 6	3.2	4.0	2.0	374.8	5.2

Platforma RARIS la 45 grade cu podina extinsa - tip MAMT

MAMT 06A 6	2.9	2.6	1.5	211.2	4.9
Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01T 8	2.5	6.0	2.0	497.2	4.5
MAMT 02T 8	2.5	4.0	2.0	400.7	4.5
MAMT 03T 8	2.5	2.6	1.5	277.1	4.5
MAMT 04T 8	4.0	4.0	1.5	454.6	6.0
MAMT 05T 8	3.2	4.0	2.0	460.3	5.2
MAMT 06T 8	2.9	2.6	1.5	270.9	4.9
Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01T 6	2.5	6.0	2.0	485.2	4.5
MAMT 02T 6	2.5	4.0	2.0	388.7	4.5
MAMT 03T 6	2.5	2.6	1.5	265.1	4.5
MAMT 04T 6	4.0	4.0	1.5	435.0	6.0
MAMT 05T 6	3.2	4.0	2.0	445.0	5.2
MAMT 06T 6	2.9	2.6	1.5	256.7	4.9
Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01G 8	2.5	6.0	2.0	399.7	4.5
MAMT 02G 8	2.5	4.0	2.0	327.7	4.5
MAMT 03G 8	2.5	2.6	1.5	229.3	4.5
MAMT 04G 8	4.0	4.0	1.5	379.6	6.0
MAMT 05G 8	3.2	4.0	2.0	381.4	5.2
MAMT 06G 8	2.9	2.6	1.5	219.1	4.9
Cod	Inaltime podina [m]	Lungime podina [m]	Latime podina [m]	Masa [kg]	Imaltime max lucru [m]
MAMT 01G 6	2.5	6.0	2.0	392.9	4.5
MAMT 02G 6	2.5	4.0	2.0	320.9	4.5
MAMT 03G 6	2.5	2.6	1.5	222.5	4.5
MAMT 04G 6	4.0	4.0	1.5	368.4	6.0
MAMT 05G 6	3.2	4.0	2.0	372.7	5.2
MAMT 06G 6	2.9	2.6	1.5	211.0	2.9

Caracteristici produs:

DIMENSIUNI GABARIT PENTRU PLATFORMA tip MAMT 01

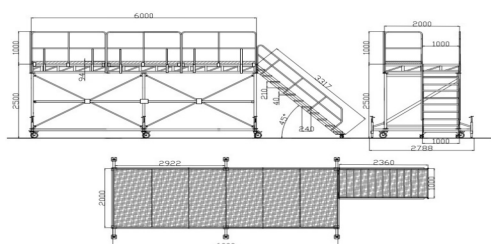

Caracteristici:

- latime trepte: 1000 / 800 / 600 [mm]
- adancime trepte: 240 mm
- grosime trepte: 40 mm
- distanta intre doua trepte consecutive
 - a) pe verticala: 210 mm
 - b) pe orizontala: 210 mm
- inaltime balustrade podina: 1000 mm
- inaltime balustrade scara: 700 mm (masurat perpendicular pe scara)