

Platforma mobila RARIS, cap tractor auto, aluminiu, la 65⁰, Gmax = 200 kg, dubla - tip PNCT



- executie conform normei **EN ISO 14122 si SR EN 131-7**
- panta de urcare: **60 grade**
- lonjeroane , balustrazi, suport : **aluminiu AlMgSi**
- podina si treptele au suprafetele din **aluminiu striat**
- greutatea maxima suportata :
 - a) pe podina: **200 kg**
 - b) pe o treapta: **150 kg**
- dimensiuni podina: **1880 x 1940 mm**
- latime trepte: **1000 mm**
- roti pivotante cu frana de diametrul **200 mm**
- suruburi de calare pentru lucru pe pardoseli neregulate


La comanda speciala se pot executa suprafetele treptelor si a podinii din **tabla expandata** sau se pot modifica dimensiunile de gabarit la dorinta clientului



Tip	Nr. trepte [trepte/trepte/podina]	Lungime [m]	Inaltime podina [m]	Inaltime totala [m]	Masa [kg]	Inaltime max. de lucru [m]
PNCT	8 / 8 / 1	3.73	2.31	3.41	150.2	4.31



Caracteristici produs:

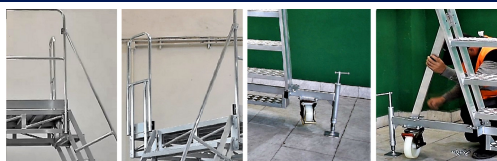

Alte caracteristici:- grosime trepte: **40 mm**
 - adancime trepte: **175 mm**- distanta intre doua trepte consecutive a) pe verticala: **265 mm** b) pe orizontala: **144 mm**- inaltime balustrade podina: **1100 mm**- protectie picior: **1000 mm** - amprenta la sol: **3730 x 2190 mm**

